



TECHNOLOGY OF TOMORROW TODAY

CIAZZ LED



ABOUT US

"Ciazz" is a brand of R.K industries an ISO 9001 : 2008, 14001: 2015 and OHSAS 18001 : 2007 Company. CIAZZ is one of the fastest rising companies dealing in electrical appliances. Based in Ghaziabad Haryana, CIAZZ in a short span of time has built a good reputation in the market due to its strict quality check measures and innovative products which are above the competing brands in the market. CIAZZ is not just a traditional electrical appliances manufacturing company, we do heavy investment in research and development to develop and provide products which are relevant to the market and are futuristic in design and utility.

LED

CIAZZ LED lights are made with the latest technology ensuring that the product is durable, cost effective and user friendly. Our products go through a strict quality check procedure leaving no space for compromises. Our LED lights are at par with the global standards, which are easy to use and comes with 2 years' warranty. CIAZZ LED Lights offers almost every lighting solution offering a wide range of international quality LED lighting for varied applications providing power efficient and long-lasting lighting. The usage ranges from residential to industrial applications.

HOMES AND OFFICES

CIAZZ LED indoor lighting are a complete lighting solution for both residential and commercial spaces. They are designed to give sophisticated, elegant look to your spaces; the exclusive and extensive product range meets every need of indoor lighting.

INDUSTRIAL LIGHTS

CIAZZ industrial lights are designed to work in extreme industrial environment like factory area, assembly lines, and warehousing facilities as well in transports hubs. CIAZZ lighting provides even distribution of light functioning in highly extreme surroundings with power, efficiency and long lasting qualities.

OUTDOOR LIGHTS

CIAZZ LED lighting provides a solution for outdoor lighting applications. CIAZZ LED lighting provides a solution with cost friendly approach, eliminating high maintenance lights and provides benefits like eliminating glare. The range can be used to light up streets, car parks, tunnels, parks etc.

DECO BULB

Product Name- **MAVEN- L**

Product features -

- Wide Operating Voltage
- Very Low Heating
- Eco Friendly

Color option -

- cool white.
- warm white
- Red
- Green
- Blue
- white

Application -

- Homes
- Offices
- Malls
- Showrooms
- Residential
- Test Labs
- Restaurants



Details	Full Moon Lamp 0.5 Watt	Divine Lamp 0.5 Watt	Half Moon Lamp 0.5 Watt	Pearl Candy Lamp 0.5 Watt	Pearl Candy Lamp 0.5 Watt
Model No.	REPL0.5WD45A	REPL0.5WD34A	REPL0.5WD40A	REPL0.5WPCLR/D	REPL0.5WPCLS/Q
Power (Rated Wattage)	0.5 Watt	0.5 Watt	0.5 Watt	0.5 Watt	0.5 Watt
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Size (Dia x Length)	45 x 68 mm	35 x 80 mm	41 x 63 mm	46 x 76 mm	50 x 74 mm
Base	B22	B22	B22	2 Pin	2 Pin

LED BULBS



Switch to Innovation

Product Name- **MAVEN**

Product features -

- Elegant & Traditional look
- Lower consumption & Energy Saving
- Replacement for CFL lamps
- Omni directional illumination
- Operating temperature: -20C to 60 C
- Operating Voltage Range - 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Offices
- Malls
- Showrooms
- Residential

[illegible]

TUBE LIGHTS

Product Name- **SALUS**

Product features -

- Elegant Look
- Die cast aluminum body
- White powder with inner ring
- Mirror Reflector
- Operating temperature: 20° c to 60 °c
- Operating Voltage range – 80V-300V

Color option -

- Cool White.
- Warm White

Application -

- Offices
- Malls
- Showrooms
- Residential



Details	10 Watt	10 Watt	18 Watt	18 Watt	22 Watt
Model No.	REPL10WTLT5BT	REPL10WTLT8BT	REPL18WTLT5BT	REPL18WTLT8BT	REPL22WTLT5BT
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	1000	1000	1800	1800	2200
Size	570 mm	1210 mm	1200 mm	1210 mm	1200 mm

SPOT LIGHT

Product Name- **LUCCENT**

Product features -

- Elegant Look
- Die cast aluminum body
- White powder with inner ring
- Mirror Reflector
- Operating temperature: 20° c to 60 °c
- Operating Voltage range – 80V-300V

Color option -

- Cool White.
- Warm White

Application -

- Offices
- Malls
- Showrooms
- Residential



Details	3 Watt	6 Watt	9 Watt	16 Watt	24 Watt	30 Watt	40 Watt
Model No.	REPL335TI3	REPL335TI6	REPL335TI9	REPL335TI16	REPL335TI24	REPL335TI30	REPL335TI40
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	300	600	900	1600	2400	3000	4000
Cut Size	54 mm Ø	72 mm Ø	72 mm Ø	95 mm Ø	120 mm Ø	140 mm Ø	145 mm Ø
Size	63 x 63 mm	85 x 85 mm	85 x 85 mm	109 x 109 mm	133 x 133 mm	160 x 160 mm	160 x 160 mm

COB LIGHTS

Product Name- **LUCCENT-M**

Product features -

- Elegant Look
- Die cast aluminum body
- White powder with inner ring
- Mirror Reflector
- Operating temperature: 20° c to 60 °c
- Operating Voltage range – 80V-300V

Color option -

- Cool White.
- Warm White

Application -

- Offices
- Malls
- Showrooms
- Residential



Details	1 Watt (Round)	1 Watt (Square)	3 Watt (Round)	3 Watt (Square)	5 Watt (Round)	5 Watt (Square)
Model No.	REPL421NM1R/D	REPL421NM1S/Q	REPL421NM3R/D	REPL421NM3S/Q	REPL421NM5R/D	REPL421NM5S/Q
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	100	100	300	300	500	500
Reflector Dia	27 mm Ø	27 x 27 mm	35 mm Ø	35 x 35 mm	57 mm Ø	57 x 57 mm
Size	31 mm Ø	30 x 30 mm	41 mm Ø	40 x 40 mm	65 mm Ø	60 x 60 mm

PANEL LIGHT-Recessed

Product Name- **ZEUS**

Product features -

- Edge Lit Panel
- Slim
- High Light Efficiency
- Uniform Light
- Operating temperature: 2ff C to 60C
- Operating Voltage Range · 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Offices
- Malls
- Showrooms
- Residential



Details	40 Watt	48 Watt
Model No.	REPL40WSPSQR/S	REPL48WSPSQR/S
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~0.95	~0.95
Lumen Flux (lm)	3800	4560
Cut Size	580 x 580 mm	580 x 580 mm
Size (Length x Width)	600 x 600 mm	600 x 600 mm

PANEL LIGHT-Surface

Product Name- **ATHENA**

Product features -

- Edge Lit Panel
- Slim
- High light Efficiency
- Uniform Light
- Operating temperature :20° C to 60°C
- Operating Voltage Range- 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Offices
- Malls
- Showrooms
- Residential



Details	40 Watt	48 Watt
Model No.	REPL40WSPSQR/S	REPL48WSPSQR/S
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~0.95	~0.95
Lumen Flux (lm)	3800	4800
Cut Size	580 x 580 mm	580 x 580 mm
Size (Length x Width)	600 x 600 mm	600 x 600 mm

SLIM PANEL LIGHT

Product Name- **IRIS-R and IRIS-S**

Product features -

- Edge Lit Panel
- Slim
- High light Efficiency
- Uniform Light
- Operating temperature :20° C to 60°C
- Operating Voltage Range- 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Offices
- Malls
- Showrooms
- Residential

IRIS-R



IRIS-S



Details	3 Watt	6 Watt	9 Watt	12 Watt	15 Watt	18 Watt	24Watt
Model No.	REPL3WSPL	REPL6WSPL	REPL9WSPL	REPL12WSPL	REPL15WSPL	REPL18WSPL	REPL24WSPL
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~0.95	~0.95	~0.95	~0.95	~0.95	~0.95	~0.95
Lumen Flux (lm)	300	600	900	1200	1500	1800	2400
Cut Size	73 mm Ø	108 mm Ø	108 mm Ø	157 mm Ø	157 mm Ø	204 mm Ø	204 mm Ø
Size	90 mm Ø	120 mm Ø	120 mm Ø	175 mm Ø	175 mm Ø	300 mm Ø	300 mm Ø

PANEL LIGHTS

Product Name- **NOVA-R and NOVA-S**

Product features -

- Edge Lit Panel
- Slim
- High light Efficiency
- Uniform Light
- Operating temperature :20° C to 60°C
- Operating Voltage Range- 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Offices
- Malls
- Showrooms
- Residential

NOVA-R



NOVA-S



Details	6 Watt	12 Watt	15 Watt	18 Watt	24Watt
Model No.	REPL6WPL	REPL12WPL	REPL15WPL	REPL18WPL	REPL24WPL
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	570	1140	1425	1750	2280
Cut Size	108 mm Ø	157 mm Ø	157 mm Ø	204 mm Ø	204 mm Ø
Size	120 mm Ø	175 mm Ø	175 mm Ø	300 mm Ø	300 mm Ø

DOWNLIGHTS

Product Name- **ARON-CS and CR**

Product features -

- Edge Lit Panel
- Slim
- High light Efficiency
- Uniform Light
- Operating temperature :20° C to 60°C
- Operating Voltage Range- 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White


Application -

- Offices
- Malls
- Showrooms
- Residential

ARON-CR



ARON-CS



Details	5 Watt	10 Watt	15 Watt	20 Watt
Model No.	REPL5WS/QBL	REPL10WS/QBL	REPL15WS/QBL	REPL20WS/QBL
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	500	1000	1500	2000
Cut Size (Square)	73 x 73 mm	115 x 115 mm	167 x 167 mm	167 x 167 mm
Size (Length x Width)	90 x 90 mm	152 x 152 mm	200 x 200 mm	200 x 200 mm
Cut Size (Round)	73 mm Ø	115 mm Ø	167 mm Ø	167 mm Ø
Size (Length x Width)	90 mm Ø	152 mm Ø	200 mm Ø	200 mm Ø

Product Name- **ODEON**

Product features -

- Elliptical lens gives wide spread of light to cover maximum area
- lower power consumption
- Eco friendly
- ReduceCO2
- Good color rendering
- Operating Voltage Range -80V- 300V
- Grade-20 & Highbay light IP Grade -67
- Operating temperature: 20° C to 60°C

Color option -

- Cool White.
- Warm White

Application -

- Street Lighting
- Campus Lighting
- Garden Lighting
- Industrial Lighting



Details	50 Watt	100 Watt	150Watt
Model No.	REPL50WHW	REPL100WHW	REPL150WHW
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	5000	10000	15000
Reflector Dia	400 mm Ø	500 mm Ø	500 mm Ø
Size	325 x 400 mm	425 x 500 mm	400 x 95 mm

STREET LIGHT-COB Street Light

Product Name- **PRESTON**

Product features -

- Elliptical lens gives wide spread of light to cover maximum area
- lower power consumption
- Eco friendly
- ReduceCO2
- Good color rendering
- Operating Voltage Range 80V- 300V
- Grade-20 & Highbay light IP Grade -67
- Operating temperature: 20° C to 60°C

Color option -

- Cool White.
- Warm White

Application -

- Street Lighting
- Campus Lighting
- Garden Lighting
- Industrial Lighting



Details	30 Watt	50 Watt
Model No.	REPL00WCSL-PDC	REPL50WCSL-PDC
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95
Lumen Flux (lm)	3000	5000
Reflector Dia	NIL	NIL
Size	510 x 215 x 70 mm	270 x 275 x 87 mm

STREET LIGHT

Product Name- **STELLAR**

Product features -

- Compact Design specially for Artiary Roads
- Service Road
- Colonies
- Replacement of Sodium Vapor & Mercury High Voltage lamps
- Operating Voltage Range-80V 300V
- IP Grade -65
- Operating temperature: 20° C to 60° C

Color option -

- Cool White.
- Warm White

Application -

- Street Lighting
- Campus Lighting
- Garden Lighting



Details	50 Watt	90 Watt	100Watt	120 Watt	150 Watt
Model No.	REPL50WSL-PDC	REPL90WSL-PDC	REPL100WSL-PDC	REPL120WSL-PDC	REPL150WSL-PDC
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	5500	9900	11000	13200	16500
Size (in mm)	395 x 330 x 190	465 x 405 x 235	465 x 405 x 235	600 x 515 x 295	600 x 515 x 295
Size (in mm)	80 x 50	80 x 50	80 x 50	95 x 60	95 x 60

FLOOD LIGHT

Product Name- **FLARE**

Product features -

- Compact Design specially for Artery Roads
- Service Road
- Colonies
- Replacement of Sodium Vapor & Mercury High Voltage lamps
- Operating Voltage Range-80V 300V
- IP Grade -65
- Operating temperature: 20° C to 60° C

Color option -

- Cool White.
- Warm White

Application -

- Showrooms
- Malls
- Area Lighting
- Outdoor Lighting
- Hoarding / Display Boards
- Facade Lighting



Details	20 Watt	30 Watt	50 Watt	100 Watt	150 Watt
Model No.	REPL20WFL	REPL30WFL	REPL50WFL	REPL100WFL	REPL150WFL
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	2000	3000	5000	10000	15000
Size	250 x 220 mm	250 x 220 mm	285 x 235 mm	290 x 235 mm	370 x 290 mm

LED BOLLARD

Product Name- **AGLOW and AGRO**

Product features -

- High light efficiency
- Uniform Light
- Operating temperature: - 20° C to 60° C
- Operating Voltage Range- 80V – 300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Parks
- Parking Lots
- Lawns
- Pathways & Bollards Application etc.

AGLOW



AGRO



Details	8 Watt	10 Watt
Model No.	REPL8WBLD	REPL10WBLD
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95

TRACK LIGHT

Product Name- **ABLAZE**

Product features -

- High light efficiency
- Uniform Light
- Operating temperature: - 20° C to 60° C
- Operating Voltage Range- 80V – 300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Pavrks
- Parking Lots
- Lawns
- Pathways & Bollards Application etc.



Details	10 Watt	20 Watt	30 Watt
Model No.	REPL10WTL	REPL20WTL	REPL30WTL
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~0.95	~0.95	~0.95
Lumen Flux (lm)	1000	2000	3000
Size	78 x 115 x 140 mm	85 x 135 x 170 mm	85 x 135 x 170 mm

WALL WASHER

Product Name- **AURORA**

Product features -

- Elegant look
- Lower consumption & Energy saving
- Consumption & Energy saving
- Operating temperature: - 20° C to 60°C
- Omni directional illumination
- Operating voltage range – 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Showrooms
- Malls
- Area Lighting
- Outdoor lighting
- Hoarding/ Display Boards
- Façade Lighting



Details	10 Watt	20 Watt	30 Watt
Model No.	REPL10WWW	REPL20WWW	REPL30WWW
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~0.95	~0.95	~0.95
Lumen Flux (lm)	1000	2000	3000
Size	110mm	155 mm	190 mm
Cut Size (Round)	95 mm Ø	130 mm Ø	175 mm Ø

CONCEAL LIGHT

Product Name- **STARLET**

Product features -

- Elegant look
- Lower consumption & Energy saving
- Consumption & Energy saving
- Operating temperature: - 20° C to 60°C
- Omni directional illumination
- Operating voltage range – 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Showrooms
- Malls
- Area Lighting
- Outdoor lighting
- Hoarding/ Display Boards
- Façade Lighting



Details	6 Watt
Model No.	REPL6WCL
Voltage / Frequency	AC 220V/50HZ
Power Factor	~0.95
Lumen Flux (lm)	600
Size	120x23 mm
Cut Size (Round)	105x23 mm Ø

HIGHER WATTAGE BULB

Product Name- **GLITZ**

Product features -

- Elegant look
- Lower consumption & Energy saving
- Consumption & Energy saving
- Operating temperature: - 20° C to 60°C
- Omni directional illumination
- Operating voltage range – 80V-300V

Color option -

- Cool White.
- Warm White
- Natural White

Application -

- Office
- Malls
- Showrooms
- Residential



Details	25 Watt	35 Watt	45 Watt
Model No.	REPL25WHWB	REPL35WHWB	REPL45WHWB
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Power Factor	~ 0.95	~ 0.95	~ 0.95
Lumen Flux (lm)	2500	3500	4500
Size (Dia x Length)	190 x 70 mm	210 x 70 mm	230 x 70 mm

DRIVER

Product Name- **VISTA**

Product features -

- Elegant look
- Medieval Ambience
- Operating temperature: - 20°C to 60°
- LED Strips available with SMPS Driver & Remote Control

Color option -


- Cool White.
- Warm White
- Natural White

Application -

- Office
- Malls
- Showrooms
- Residential



Details	2 amp	3 amp	5 amp	10 amp	15 amp	36 Watt	72 Watt	RGB*
Model No.	REPL2AMP	REPLEAMP	REPL5AMP	REPL10AMP	REPL15AMP	REPL36WSTP	REPL72WSTP	REPLRGBSTP
Voltage / Frequency	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ	AC 220V/50HZ
Size (in mm)	110x53x40	120x55x40	170x50x43	182x50x37	185x72x44	5 Meter Roll	5 Meter Roll	5 Meter Roll

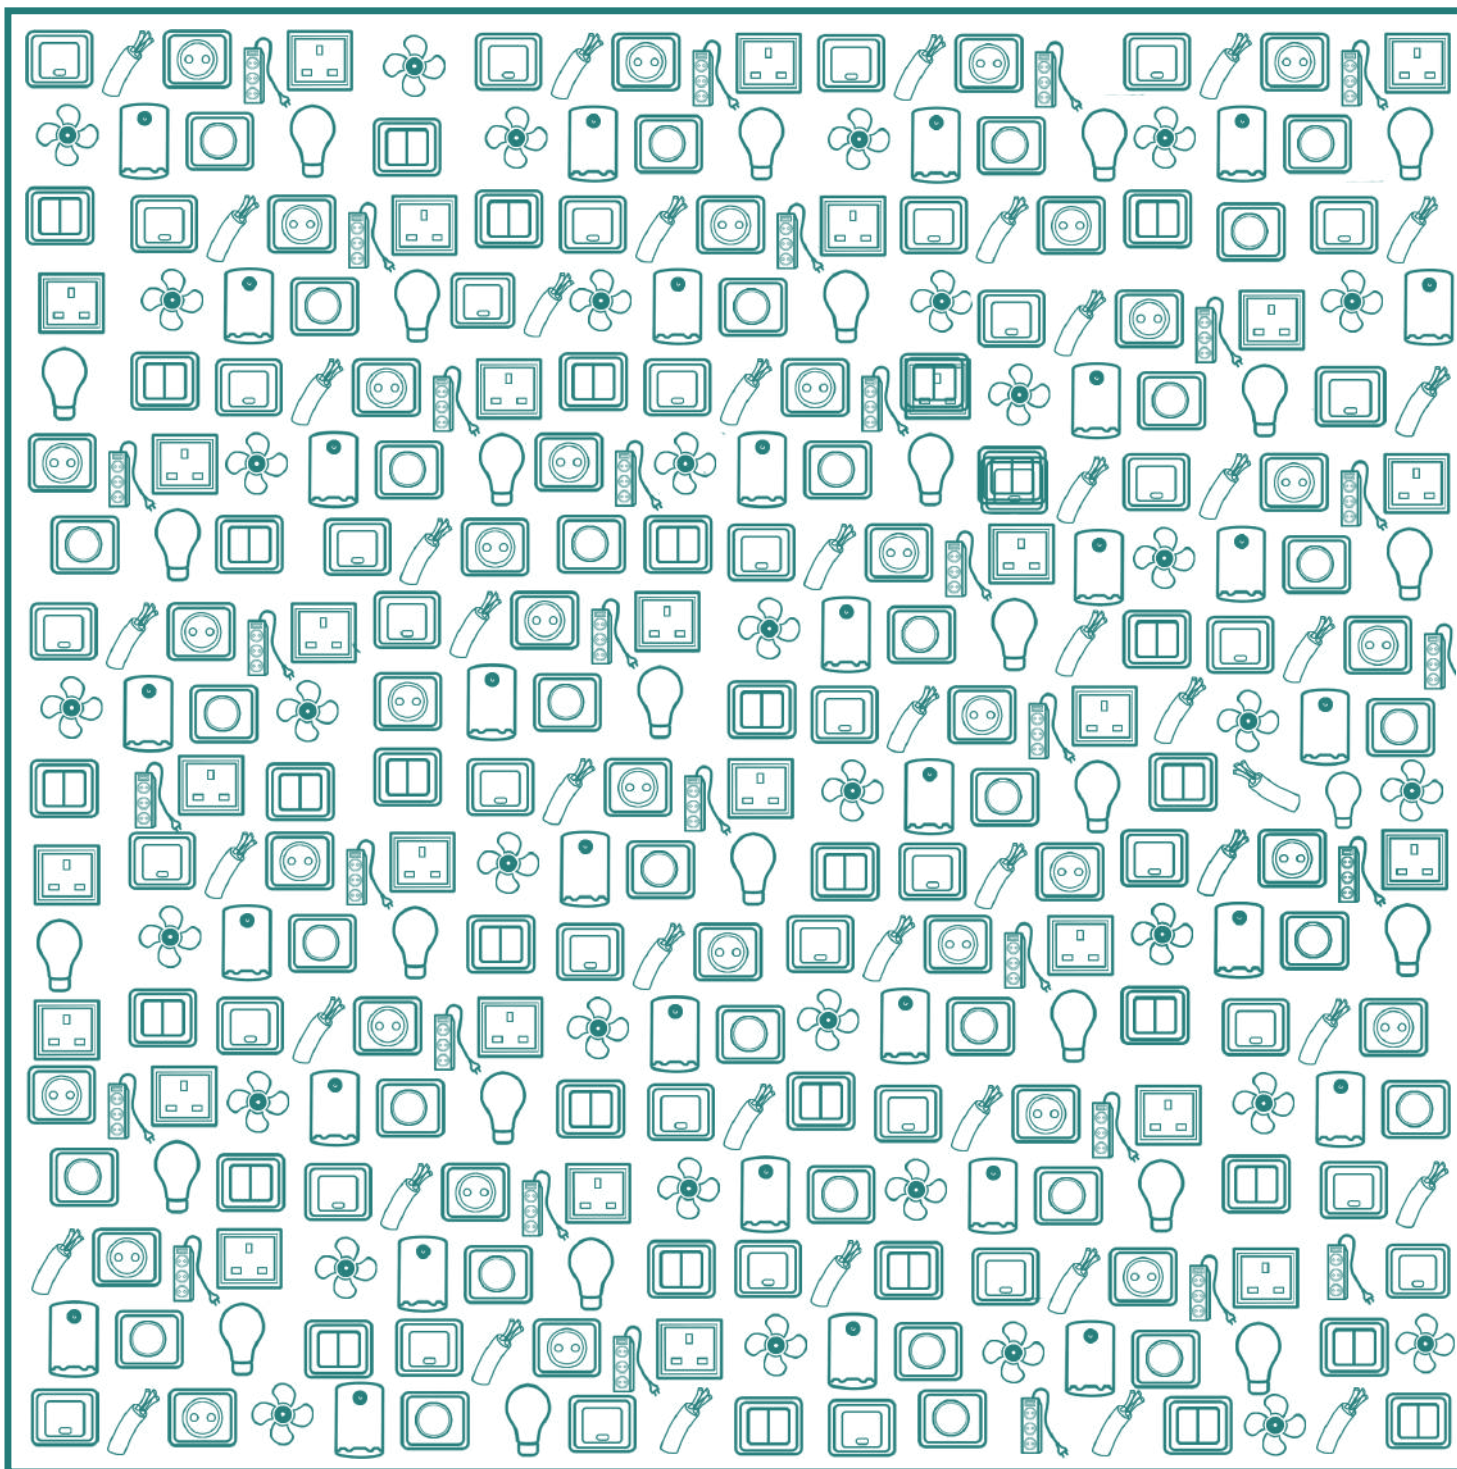



Switch to Innovation

www.ciazz.com | chetan@ciazz.com | +91 (0) 9899995971